

**Green. Enhanced. Easy to Use.**

Combines green benefits with enhanced performance.

**PROMELT  
SLICER  
ENHANCED**



## Product Overview

*PROMELT SLICER ENHANCED* is a natural complex chloride blend that is treated with an organically based performance enhancer designed specifically to reduce bounce and scatter, increase the speed at which the salt begins to work and enable the salt to continue working at lower temperatures. Each granule is completely encapsulated with a blend of magnesium chloride and a viscosity modifier producing effective, longer-lasting melting performance that will reduce overall usage by as much as 25%.

Municipalities are realizing the added benefits of applying treated salt on their roadways and now this environmentally friendlier product is made available in convenient, easy to handle 44lb (20kg) bags. The smaller sized granule is ideal for spreader usage, easy to handle and will actually reduce your application rates which will lead to less total de-icers needed to keep all surfaces clean. Not only will it work to lower temperatures, but you will further achieve reduction in costs as less product will go further.

## Product Features

- Emits less chlorides into the environment
- Helps to protect your equipment from corrosion caused by salt
- Less harmful to concrete and the environment due to its low alkalinity
- 100% natural
- Low toxicity (LD50)
- Increased speed & effectiveness of melting agents
- Longer lasting residual effect, reducing re-application frequency
- Performs to -6°F (-21°C)
- Appealing color prevents over application
- Easy application - convenient 44lb (20kg) packaging for easy handling



**READY WHEN NATURE STRIKES. GUARANTEED.**


## Reduction in ion emission per application rate

Sodium & Chloride Ion Reduction Chart

Application Rate	Rock Salt	PROMELT SLICER ENHANCED
	228 gms / m <sup>2</sup>	57 to 76 gms / m <sup>2</sup>
Chloride Ion Contribution	138.3 gms / m <sup>2</sup>	34.6 to 46.10 gms / m <sup>2</sup>
Sodium Ion Contribution	89.7 gms / m <sup>2</sup>	22.4 to 29.9 gms / m <sup>2</sup>

## Corrosion Chart

PNS Relative Corrosion Rate

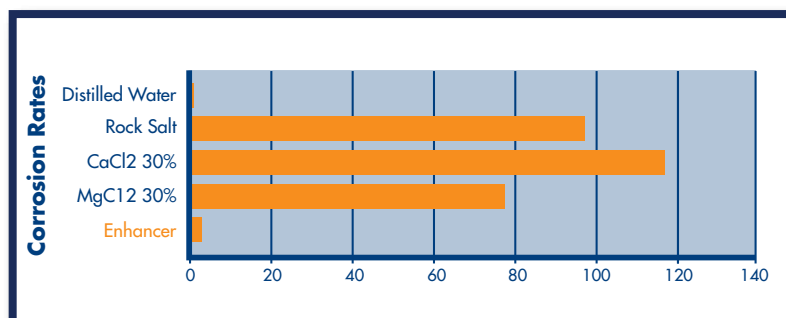

## Residual



## Product Application

For application in general conditions, evenly sprinkle ¼ to 1/3 cup (57 to 76 grams) of *PROMELT SLICER ENHANCED* per square yard (metre) for driveways and walkways. Melting begins immediately and melting action will continue longer than many other commonly used de-icers. Shovel off slush. Thick accumulations of ice may require additional applications. For optimum results, remove all loose snow and slush from driveways, steps and walkways before applying.

*PROMELT SLICER ENHANCED* is extremely effective if applied at the start of a snowfall or freezing of surface dampness. *PROMELT SLICER ENHANCED* may also be kept in cars and trucks for use in any situation where traction is required. Spread a generous amount in the path of traction wheels to get out of slick parking areas or other places where additional traction may be necessary.

Distributed by:



READY WHEN NATURE STRIKES. GUARANTEED.

🇨🇦 78 Orchard Road, Ajax, Ontario, Canada L1S 6L1 • 1-800-387-5777 • [www.innovativecompany.com](http://www.innovativecompany.com)

🇺🇸 454 River Road, Glenmont, NY 12077 • 1-800-257-5808 • [orders@innovativecompany.com](mailto:orders@innovativecompany.com)